

Bimetallic Thermostat TM4-M3 Series

Description

The TM4 thermostat allows the switching of an electrical contact when a fixed temperature value is reached.

Technical Features


Hexagonal body: 27mm hexagon in brass
Hydraulic connection F: 3/8"BSP, 1/2"BSP, M22 x 1.5
Fixed intervention value: On request from 40°C to 120°C
Maximum pressure: 200 bar
Contacts: N.O. (Normally Open) or N.C. (Normally Closed)

Seal: NBR
Switching frequency: 20 cycles / min
Operating temperature: -20 ÷ 120 °C
Intervention accuracy: ± 3.5 °C
Hysteresis fixed value: ~ 12 °C of the set value

Load on contacts:
220 VAC / 10 A
125 VAC / 15A

24 VDC / 10 A
12 VDC / 10 A

Electric connection: DIN 43650
Electrical protection DIN40050: IP65

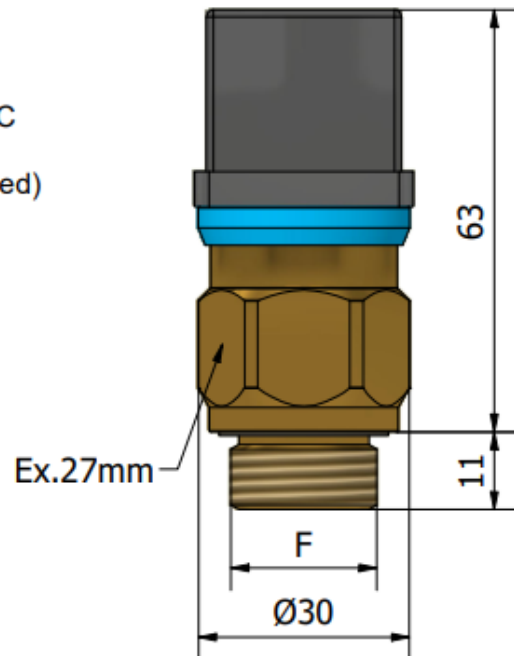

Free 360° connector rotation

